

BROILYGRILL®

BRE7001



TECHNICAL FEATURES

DIMENSIONS (mm) 800x450/630x745h	DIM. COOKING TOP (mm) 470x380
SUPPLY 3NAC400V 50/60 Hz 16A	POWER (kW) 5,0
WATER DISCHARGE 3/4"	TROLLEY Adjustable in height, removable
WATER PAN Nr. 2 removables	DRIP TRAY Removable
PACKAGING DIMENSIONS (mm) 950x800x950h	VOLUME (m³) 0,73
NET/GROSS WEIGHT (Kg) 68/88	STRUCTURE AISI 304 stainless steel
TEMPERATURE 850°C	CERTIFICATION CE

DESCRIPTION

Infrared cooking 850°C.

Equipped with 2 high efficiency resistors, temp. 850°C:

- Knob pos. 1: MAXIMUM temperature on the left zone.
- Knob pos. 2: MAXIMUM temperature on the right zone.
- Knob pos. 3: MAXIMUM temperature on both zones.

Extractable trolley, adjustable in height on nr. 6 levels, disassemblable for easy cleaning.

Robust high-conduction grids in stainless steel AISI 304, removable for easy cleaning.

Tray on guides to contain cooking residues, extractable at the same time of the cooking grid.

Nr. 2 removable water pans placed on the bottom of the cooking chamber.





Cooking chamber bottom with drain for easy cleaning.

Structure realised in AISI 304 stainless steel with AISI 304 stainless steel adjustable legs.

** The manufacturer reserves the right to modify any product without prior notice.*

BROILYGRILL®

BRE7001

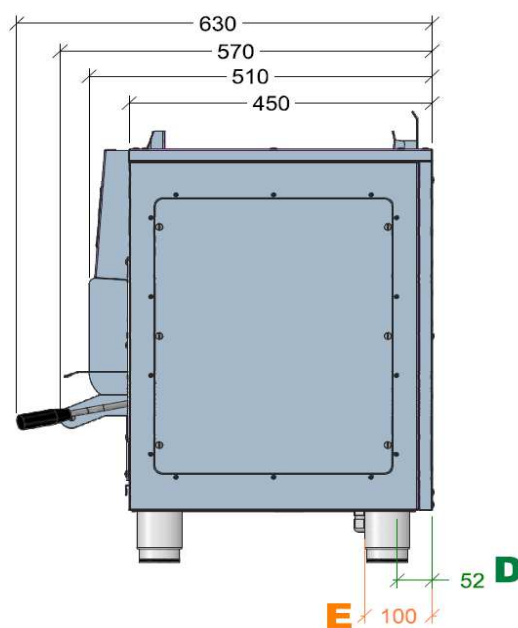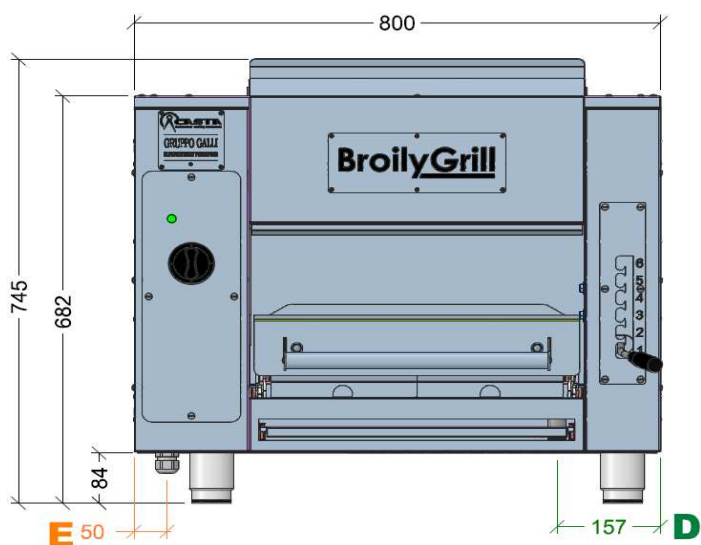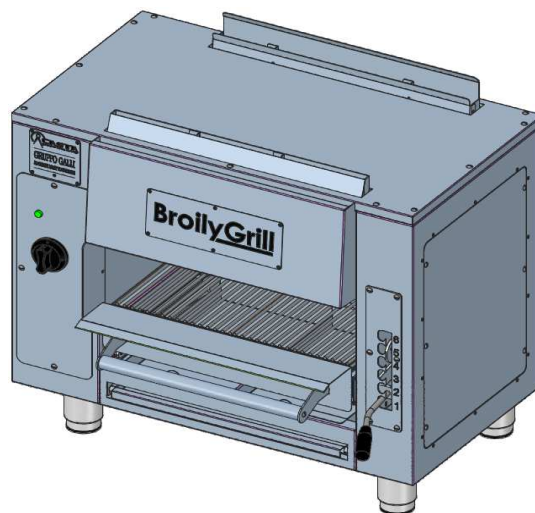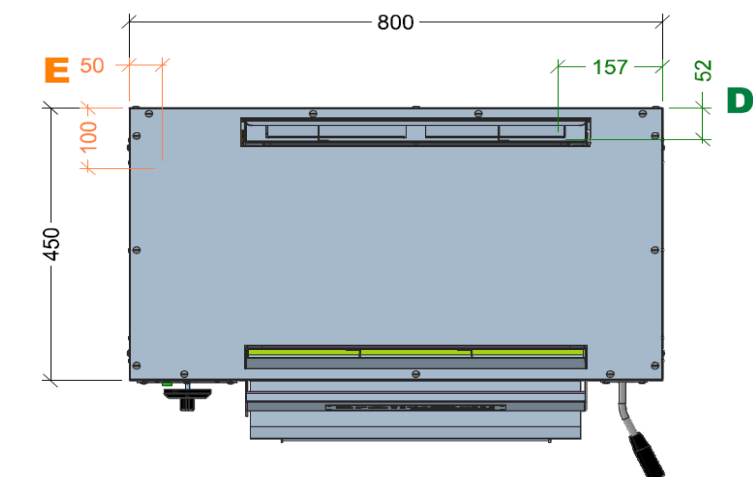

Product: BRE7001

G	Allaccio gas	Gas inlet	Entrée gaz	Entrada de gas	Gasanschluss	
W	Allaccio acqua	Water inlet	Entrée d'eau	Entrada de agua	Wassarzulauf	
D	Scarico acqua	Water discharge	Décharge d'eau	Descarga de agua	Wasserabfluss	Ø 3/4"
E	Cavo elettrico	Electrical cable	Câble électrique	Cable eléctrico	Elektrisches kabel	H07RN-F 5x2,5x2ml
kW gas:		kW electric: 5,0 380-415 3N~ 50/60 Hz				Ampere: 11,0

* The manufacturer reserves the right to modify any product without prior notice.